



GEM REFRIGERATING CHAMBERS

MAIN FEATURES:

- › Capacity: 3 bodies/coffins
- › 1 swiveling door 1695x840 mm
- › For preservation temperature (0° - 10°) programmable
- › Interior and exterior finishing in stainless steel
- › Ecological gas used
- › Digital command and control of the planning

COD. GEM: 123 001 005



**Gem
Matthews**

GEM - Matthews International S.r.l.
33100 Udine / Italia - Via Zanussi 315 / Z.I.U.
tel 0432 524374 / 524103 - fax 0432 529977
email gem@matweu.com - www.geminc.it

Also available in other VERSIONS:
(some examples)




ACCESSORIES FOR CREMATION

GEM REFRIGERATING CHAMBERS

TECHNICAL DATA

Panel thickness.....60 mm
 Panel sponge polyurethane injected without CFC
 Density.....40 kg/m³
 Fire resistance.....M-2 (ASTM D 1692)
 In compliance with health regulation according
 to EC directive 90/128
 Internal self-supporting structure (not necessary
 to pierce the panel)
 Prismatic guides for the sliding of tray
 3 concave trays for the collection of liquids
 6 wheels for each tray
 Trays
 Equipment for compact refrigeration
 Interior light
 Power.....0.7 Kw
 Voltage.....220/1/50
 Discharge for hot gas

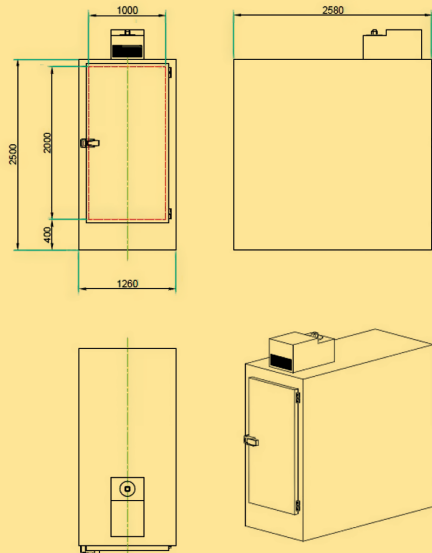

GEM - Matthews International S.r.l.
 33100 Udine / Italia - Via Zanussi 315 / Z.I.U.
 tel 0432 524374 / 524103 - fax 0432 529977
 email gem@matweu.com - www.geminc.it